



Lapač nečistot koš z PVC-U, s šroubeními, s ANSI* přírubami

Popis


*ANSI = ASME B16.5 Třída 150

EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	A (mm)	PN	Drilling : Ø
1	20	15	1/2"	297	274	10	0.79
2	25	20	3/4"	297	280	10	0.79
3	32	25	1"	297	296	10	0.79
4	40	32	1"1/4	394	397	10	3.2
5	50	40	1"1/2	394	403	10	3.2
6	63	50	2"	394	413	10	3.2
7	75	65	2"1/2	566	534	10	3.2
8	90	80	3"	566	517	10	3.2
9	110	100	4"	566	562	10	3.2
10	160	150	6"	1013	569	10	3.2
11	225	200	8"	1013	640	10	3.2

FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	A (mm)	PN	Drilling : Ø
1	20	15	1/2"	297	274	10	0.79
2	25	20	3/4"	297	280	10	0.79
3	32	25	1"	297	296	10	0.79
4	40	32	1"1/4	394	397	10	3.2
5	50	40	1"1/2	394	403	10	3.2
6	63	50	2"	394	413	10	3.2
7	75	65	2"1/2	566	534	10	3.2
8	90	80	3"	566	517	10	3.2
9	110	100	4"	566	562	10	3.2
10	160	150	6"	1013	569	10	3.2
11	225	200	8"	1013	640	10	3.2

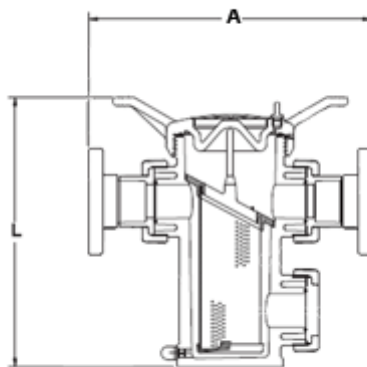

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz