




Dvoučinný (DA) pneupohonem typ UT-MT pro 1/4 otáčkové ventily

Popis

*Torque @5,62bars **F04 = on request

Pro jiné materiály pláště nebo utahovací momenty nás prosím kontaktujte

#	L (mm)	M (mm)	TYPE	Casing material	ISO 5211 connection	Torque @ 5.62 bar
1	119	70	UT10	Polyamide	F03-F04 / 11	14.1
2	160	90	UT13	Polyamide	F04**-F05-F07 / 14	30.9
3	175	111.5	UT18	Polyamide	F04**-F05-F07 / 17	56.5
4	119	71	MT05	Aluminium	F03-F05 / 11	14.1
5	175	81	MT15	Aluminium	F04**-F05-F07 / 14	30.9
6	186	98	MT20	Aluminium	F05-F07 / 17	56.5
7	248	98	MT25	Aluminium	F05-F07 / 17	84.5
8	241	117	MT30	Aluminium	F05-F07 / 17	112.7
9	261	154	MT35	Aluminium	F07-F10 / 22	180.4
10	305	154	MT40	Aluminium	F07-F10 / 22	225.7
11	367	168.5	MT45	Aluminium	F07-F10 / 22	352.7
12	428	202	MT55	Aluminium	F10-F12 / 27	676.4
13	467	257	MT60	Aluminium	F10-F14 / 36	1029.6
14	525	257	MT65	Aluminium	F10-F14 / 36	1357.8
15	636	328	MT70	Aluminium	F14-F16 / 46	2658

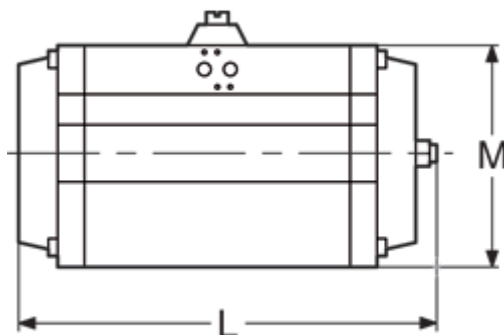

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz