



Bez vzduchu zavřeno pneupohon lopatkový pro 1/4 otáčkové ventily


Popis

*Točivý moment @5,5 bar

Please contact us for other torques

#	H (mm)	A (mm)	B (mm)	TYPE	Casing material	ISO 5211 connection
1	117	113	102	033F120	Zamak + epoxy	F03-F05 / 11
2	138	137	117	053F120	Zamak + epoxy	F04-F05 / 14
3	128	178	182	073F120	Aluminium + epoxy	F05-F07 / 17
4	187	208	197	083F120	Aluminium + epoxy	F07 / 17
5	212	227	218	093F120	Aluminium + epoxy	F07-F10 / 22
6	232	230	265	103F120	Aluminium + epoxy	F10 / 22
7	250	294	248	123F120	Aluminium + epoxy	F10 / 22
8	284	380	417	143F120-4900	Aluminium + epoxy	F12 / 27
9	407	433	503	153F120	Aluminium + epoxy	F14 / 36
10	564	530	486	163F120	Aluminium + epoxy	F14 / 36

#	Springs torque bar	Opening torque @ 5.62 bar
1	10,3 - 8,7	10,6 - 9,0
2	20,9 - 17,5	21,5 - 18,1
3	50,8 - 42,4	52,6 - 44,2
4	81,3 - 65,5	89,5 - 73,7
5	104,0 - 93,8	105,2 - 95,0
6	164,0 - 143,0	182,0 - 161,0
7	238,0 - 204,0	242,0 - 208,0
8	529,0 - 447,0	633,0 - 551,0
9	962,0 - 790,0	1018,0 - 846,0
10	1321,0 - 1081,0	1339,0 - 1099,0

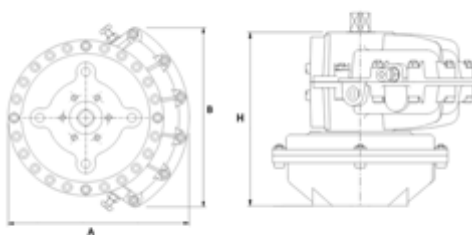

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz