




Bez vzduchu zavřeno pneupohon typ PP-PA pro 1/4 otáčkové ventily

Popis

*Točivý moment @5,5 bar

Pro jiné materiály pláště nebo utahovací momenty nás prosím kontaktujte

#	L (mm)	H (mm)	TYPE	Casing material	ISO 5211 connection	Springs torque bar	Opening torque @ 5.62 bar
1	144	89	PPWS	Polyamide	F04 / 11	8.5 - 5.8	9.7 - 7.0
2	157	102	PP00S	Polyamide	F05 / 14	15.8 - 10.7	15.2 - 10.2
3	230	123	PP10S	Polyamide	F05-F07 / 17	38.0 - 25.7	39.3 - 27.0
4	313	147	PP20S	Polyamide	F07 / 22	87.2 - 54.8	96.2 - 63.8
5	141	89	PAWS	Rilsan aluminium	F03-F04 / 11	8.5 - 5.8	9.7 - 7.0
6	155	102	PA00S	Rilsan aluminium	F04-F05 / 14	15.8 - 10.7	15.3 - 10.2
7	201	119	PA05S	Rilsan aluminium	F05-F07 / 17	27.0 - 17.4	27.9 - 18.3
8	226	123	PA10S	Rilsan aluminium	F05-F07 / 17	38.0 - 25.7	39.3 - 27.0
9	265	139	PA15S	Rilsan aluminium	F05-F07 / 17	59.6 - 40.9	65.3 - 46.6
10	312	147	PA20S	Rilsan aluminium	F05-F07 / 22	87.2 - 54.8	96.2 - 63.8
11	358	175	PA25S	Rilsan aluminium	F07-F10 / 27	181.8 - 119.4	145.5 - 83.1
12	429	191	PA30S	Rilsan aluminium	F07-F10 / 27	290.3 - 195.7	233.0 - 138.4
13	598	272	PA40ST	Rilsan aluminium	F07-F10 / 27	766.9 - 491.6	588.4 - 313.4
14	694	309	PA50S	Rilsan aluminium	F10-F14 / 36	1425.0 - 819.5	1070.0 - 464.0
15	672	368	PA60S	Rilsan aluminium	F16 / 46	2075.0 - 1383.0	1772.0 - 1080.0
16	743	428	PA70S	Rilsan aluminium	F16 / 46	3539.0 - 1769.0	2831.0 - 1062.0

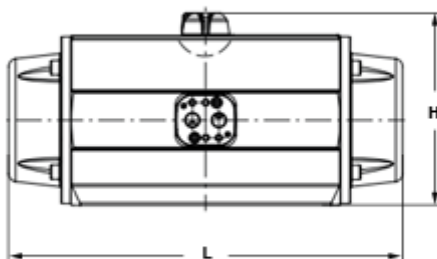

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz