


PP-H kulový ventil, 2-cestný, se šroubením, s ANSI* přírubami

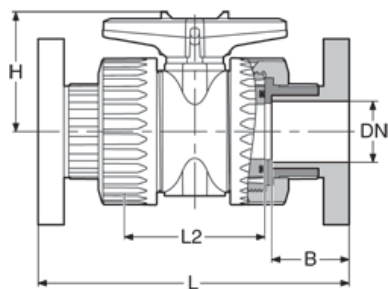

Popis

* DIN = EN1092-1 PN10 ANSI = ASME B16.5 třída 150

DN15 až DN50 : standardní zamykání

EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L2 (mm)	H (mm)	B (mm)	PN
1	20	15	1/2"	153	64	52	44.5	10
2	25	20	3/4"	158	69	62	46	10
3	32	25	1"	181	76.5	69	53	10
4	40	32	1 1/4"	210	93	85	59	10
5	50	40	1 1/2"	224	93	85	66	10
6	63	50	2"	250	114	98	68	10
7	75	65	2 1/2"	278	116.5	142	80.5	7
8	90	80	3"	325	149	165	88	7
9	110	100	4"	376	175	170	97.8	7

FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L2 (mm)	H (mm)	B (mm)	PN
1	20	15	1/2"	153	64	52	44.5	10
2	25	20	3/4"	158	69	62	46	10
3	32	25	1"	181	76.5	69	53	10
4	40	32	1 1/4"	210	93	85	59	10
5	50	40	1 1/2"	224	93	85	66	10
6	63	50	2"	250	114	98	68	10
7	75	65	2 1/2"	278	116.5	142	80.5	7
8	90	80	3"	325	149	165	88	7
9	110	100	4"	376	175	170	97.8	7

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz