


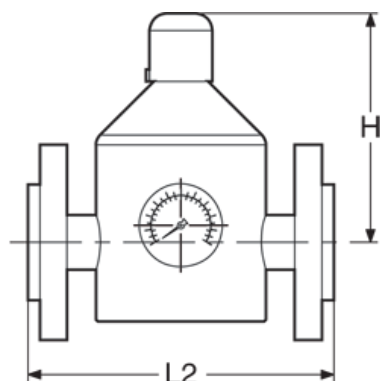

Redukční ventil in PVC-U, s DIN* přírubami

Popis

* DIN = EN1092-1 PN10/16

EPDM

#	d (mm)	DN (mm)	DN (inch)	L2 (mm)	H (mm)	PN	Setting range
1	15	10	3/8"	140	112	10	0.5 - 9
2	20	15	1/2"	140	112	10	0.5 - 9
3	25	20	3/4"	180	130	10	0.5 - 9
4	32	25	1"	180	130	10	0.5 - 9
5	40	32	1"1/4	230	175	10	0.5 - 9
6	50	40	1"1/2	230	175	10	0.5 - 9
7	63	50	2"	250	210	10	0.5 - 9
8	75	65	2"1/2	306	250	6	0.5 - 5
9	90	80	3"	370	305	6	0.5 - 5
10	110	100	4"	430	345	4	1 - 3

FPM

#	d (mm)	DN (mm)	DN (inch)	L2 (mm)	H (mm)	PN	Setting range
1	15	10	3/8"	140	112	10	0.5 - 9
2	20	15	1/2"	140	112	10	0.5 - 9
3	25	20	3/4"	180	130	10	0.5 - 9
4	32	25	1"	180	130	10	0.5 - 9
5	40	32	1"1/4	230	175	10	0.5 - 9
6	50	40	1"1/2	230	175	10	0.5 - 9
7	63	50	2"	250	210	10	0.5 - 9

PTFE

#	d (mm)	DN (mm)	DN (inch)	L2 (mm)	H (mm)	PN	Setting range
1	75	65	2"1/2	306	250	6	0.5 - 5
2	90	80	3"	370	305	6	0.5 - 5
3	110	100	4"	430	345	4	1 - 3

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz