


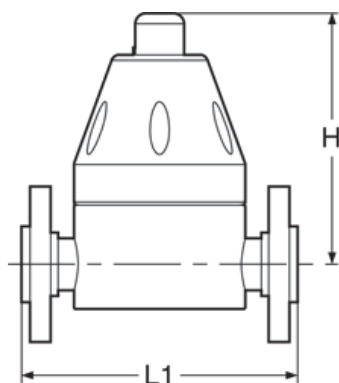

Barostatický ventil z PP-H, s DIN* přírubami

Popis

* DIN = EN1092-1 PN10/16

EPDM

#	d (mm)	DN (mm)	DN (inch)	L1 (mm)	H (mm)	PN	Setting range
1	15	10	3/8"	168	137	10	0.5 - 10
2	20	15	1/2"	168	137	10	0.5 - 10
3	25	20	3/4"	168	137	10	0.5 - 10
4	32	25	1"	208	199	10	0.5 - 10
5	40	32	1 1/4"	212	199	10	0.5 - 10
6	50	40	1 1/2"	266	290	10	0.5 - 10
7	63	50	2"	266	290	10	0.5 - 10
8	75	65	2 1/2"	294	275	6	1 - 6
9	90	80	3"	374	410	6	1 - 6
10	110	100	4"	394	485	4	1 - 4

PTFE

#	d (mm)	DN (mm)	DN (inch)	L1 (mm)	H (mm)	PN	Setting range
1	15	10	3/8"	168	137	10	0.5 - 10
2	20	15	1/2"	168	137	10	0.5 - 10
3	25	20	3/4"	168	137	10	0.5 - 10
4	32	25	1"	208	199	10	0.5 - 10
5	40	32	1 1/4"	212	199	10	0.5 - 10
6	50	40	1 1/2"	266	290	10	0.5 - 10
7	63	50	2"	266	290	10	0.5 - 10
8	75	65	2 1/2"	294	275	6	1 - 6
9	90	80	3"	374	410	6	1 - 6
10	110	100	4"	394	485	4	1 - 4

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz