



PVC-U kulový ventil, 3-cestný, s šroubeními, PVC-U pro lepení, příprava pro pohon

Popis

Další koncové přípojky: viz část "Tvarovky".


When ordering an actuated valve with T-port ball, please specify the desired version (Set up)

EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L1 (mm)	H (mm)	PN	CONNECTION	ISO 5211	45° square male
1	20	15	1/2"	137	68.5	65	16	F03	F03 / 11	11
2	25	20	3/4"	172	86	65	16	F03	F03 / 11	11
3	32	25	1"	200	100	68	16	F03	F03 / 11	11
4	40	32	1 1/4"	208	104	68	16	F03	F03 / 11	11
5	50	40	1 1/2"	240	120	107	16	F05	F05 / 14	14
6	63	50	2"	246	123	107	16	F05	F05 / 14	14

FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	L1 (mm)	H (mm)	PN	CONNECTION	ISO 5211	45° square male
1	20	15	1/2"	137	68.5	65	16	F03	F03 / 11	11
2	25	20	3/4"	172	86	65	16	F03	F03 / 11	11
3	32	25	1"	200	100	68	16	F03	F03 / 11	11
4	40	32	1 1/4"	208	104	68	16	F03	F03 / 11	11
5	50	40	1 1/2"	240	120	107	16	F05	F05 / 14	14
6	63	50	2"	246	123	107	16	F05	F05 / 14	14

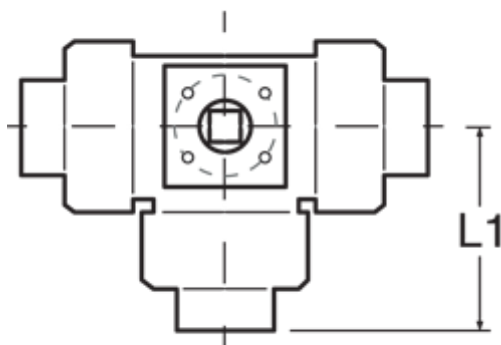

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz