



Standardní elektropohon pro 1/4 otáčkové ventily

Popis


400V 3 fáze: kontaktujte nás

Celkové rozměry: viz katalogový list

Pro více možností, kontaktujte nás

#	TYPE	Voltage	ISO 5211 connection	Operating torque
1	ER10	100-240 VAC / 100-350 VDC	F03-F04-F05 / 14	10
2	ER20	100-240 VAC / 100-350 VDC	F05 / 14	20
3	ER35	100-240 VAC / 100-350 VDC	F05-F07 / 22	35
4	ER60	100-240 VAC / 100-350 VDC	F05-F07 / 22	60
5	ER100	100-240 VAC / 100-350 VDC	F05-F07 / 22	100
6	VS150	100-240 VAC / 100-350 VDC	F07-F10 / 22	125
7	VS300	100-240 VAC / 100-350 VDC	F07-F10 / 22	250
8	VT600	100-240 VAC / 100-350 VDC	F10-F12 / 36	450
9	VT1000	100-240 VAC / 100-350 VDC	F10-F12 / 36	750
10	VT1500	100-240 VAC / 100-350 VDC	F12-F16 / 46	1200
11	ER10	15-30 VAC / 12-48 VDC	F03-F04-F05 / 14	10
12	ER20	15-30 VAC / 12-48 VDC	F05 / 14	20
13	ER35	15-30 VAC / 12-48 VDC	F05-F07 / 22	35
14	ER60	15-30 VAC / 12-48 VDC	F05-F07 / 22	60
15	ER100	15-30 VAC / 12-48 VDC	F05-F07 / 22	100
16	VS150	15-30 VAC / 12-48 VDC	F07-F10 / 22	125
17	VS300	15-30 VAC / 12-48 VDC	F07-F10 / 22	250

#	Operating time 90°	IP protection
1	11	66
2	12	66
3	7	66
4	12	66
5	23	66
6	30	68
7	60	68
8	38	68
9	38	68
10	113	68
11	11	66
12	12	66
13	7	66
14	12	66
15	23	66
16	30	68
17	60	68

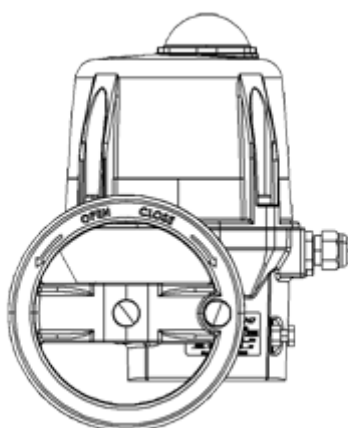

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz