

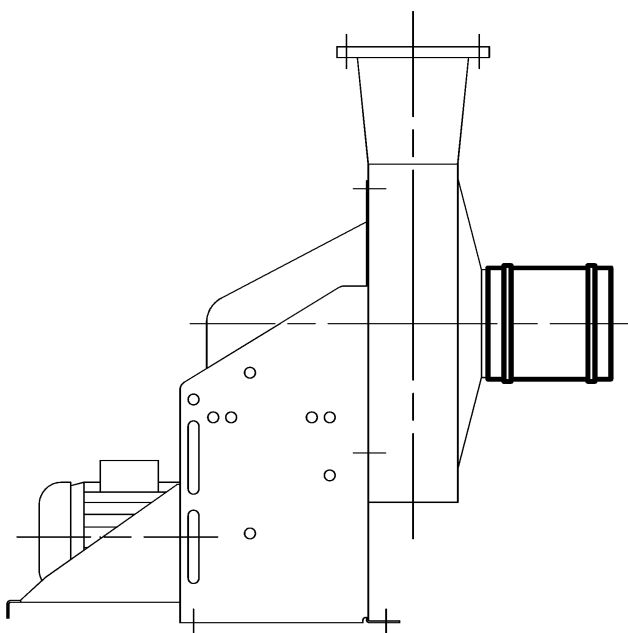
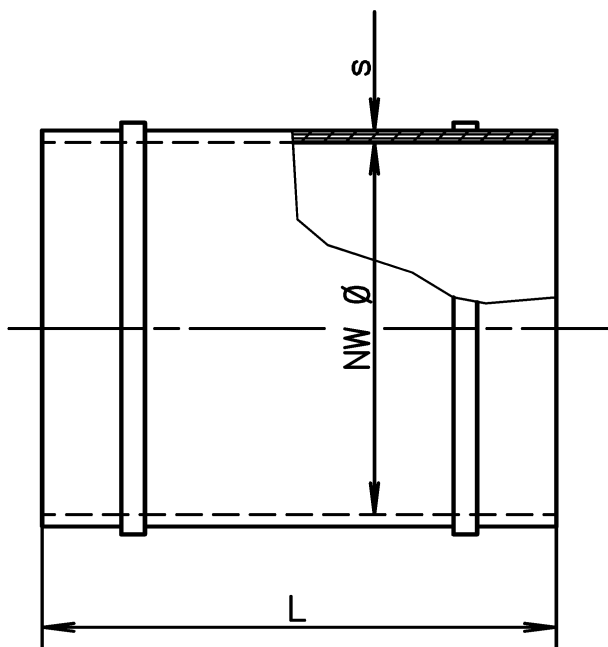


PVC pouzdro s přichytnými pásky, nerezová ocel

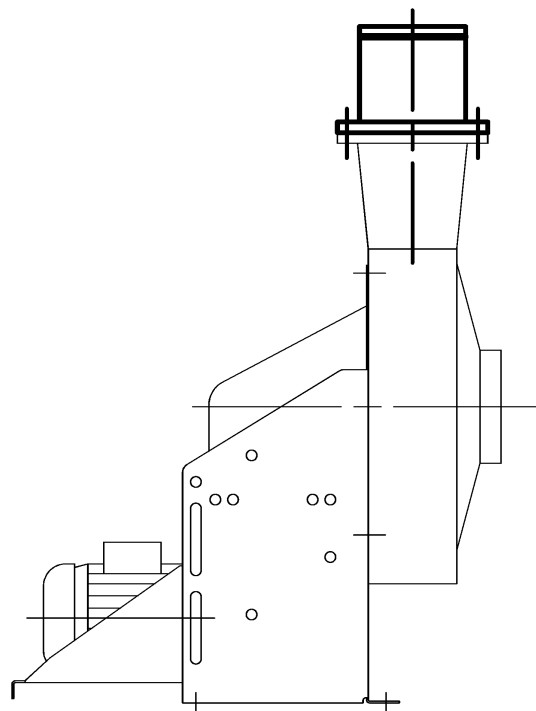



NW Ø	L	s
63-250	100	2

- Pouzdro s přírubou na jedné straně (PVC)

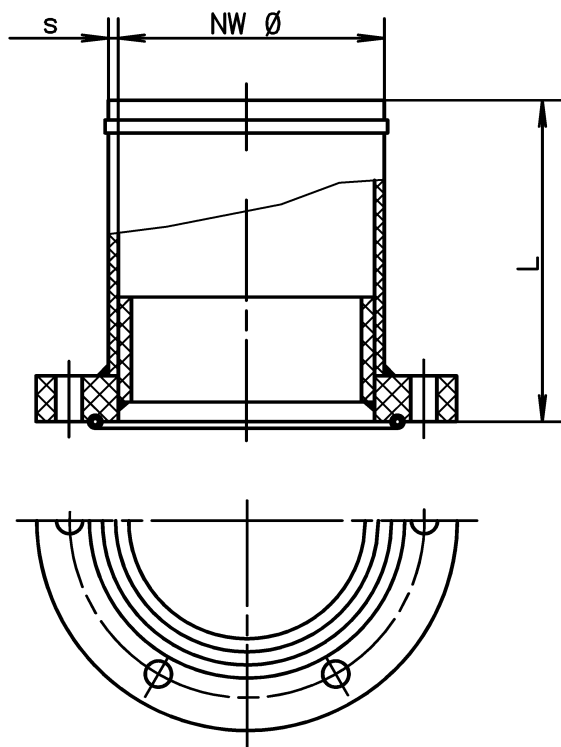


NW Ø	L	s
63-90	110	2
125-200	112	2
250	115	2

- Kruhové pouzdro s přírubou na obou stranách (PVC)

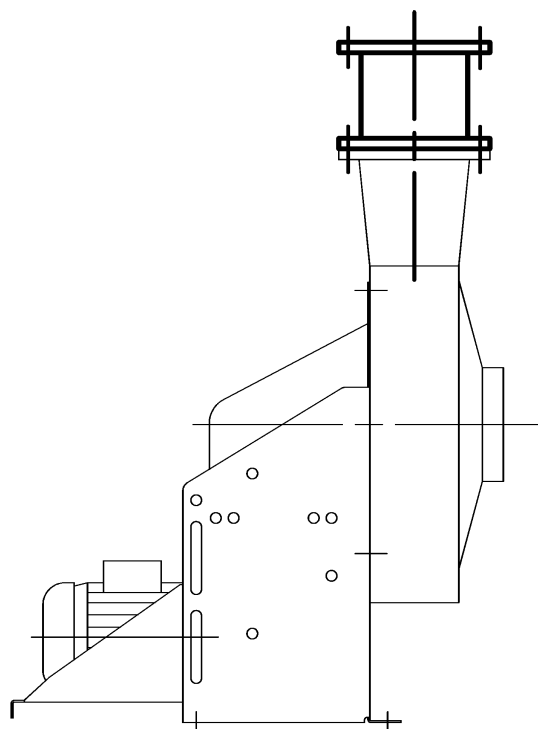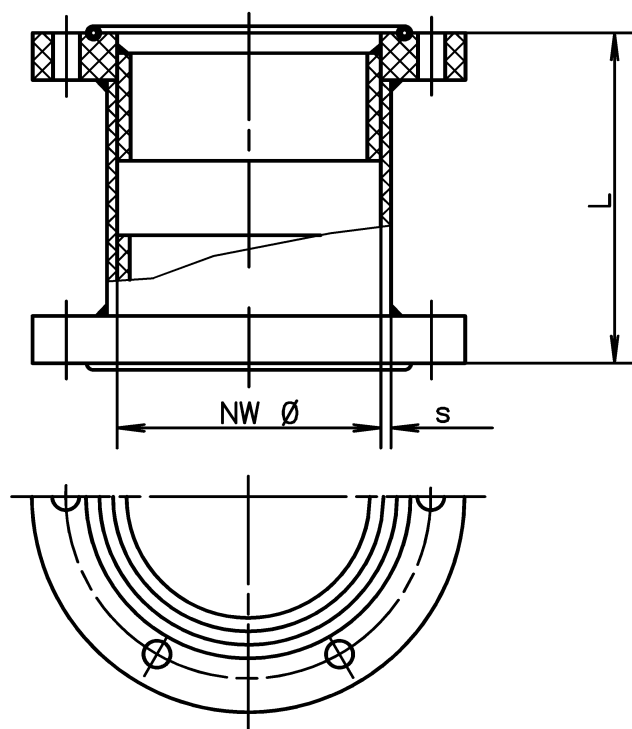





NW Ø	L	s
63-90	120	2
125-200	124	2
250	130	2

Příruba PP / PPs / PVC / PE / PVDF

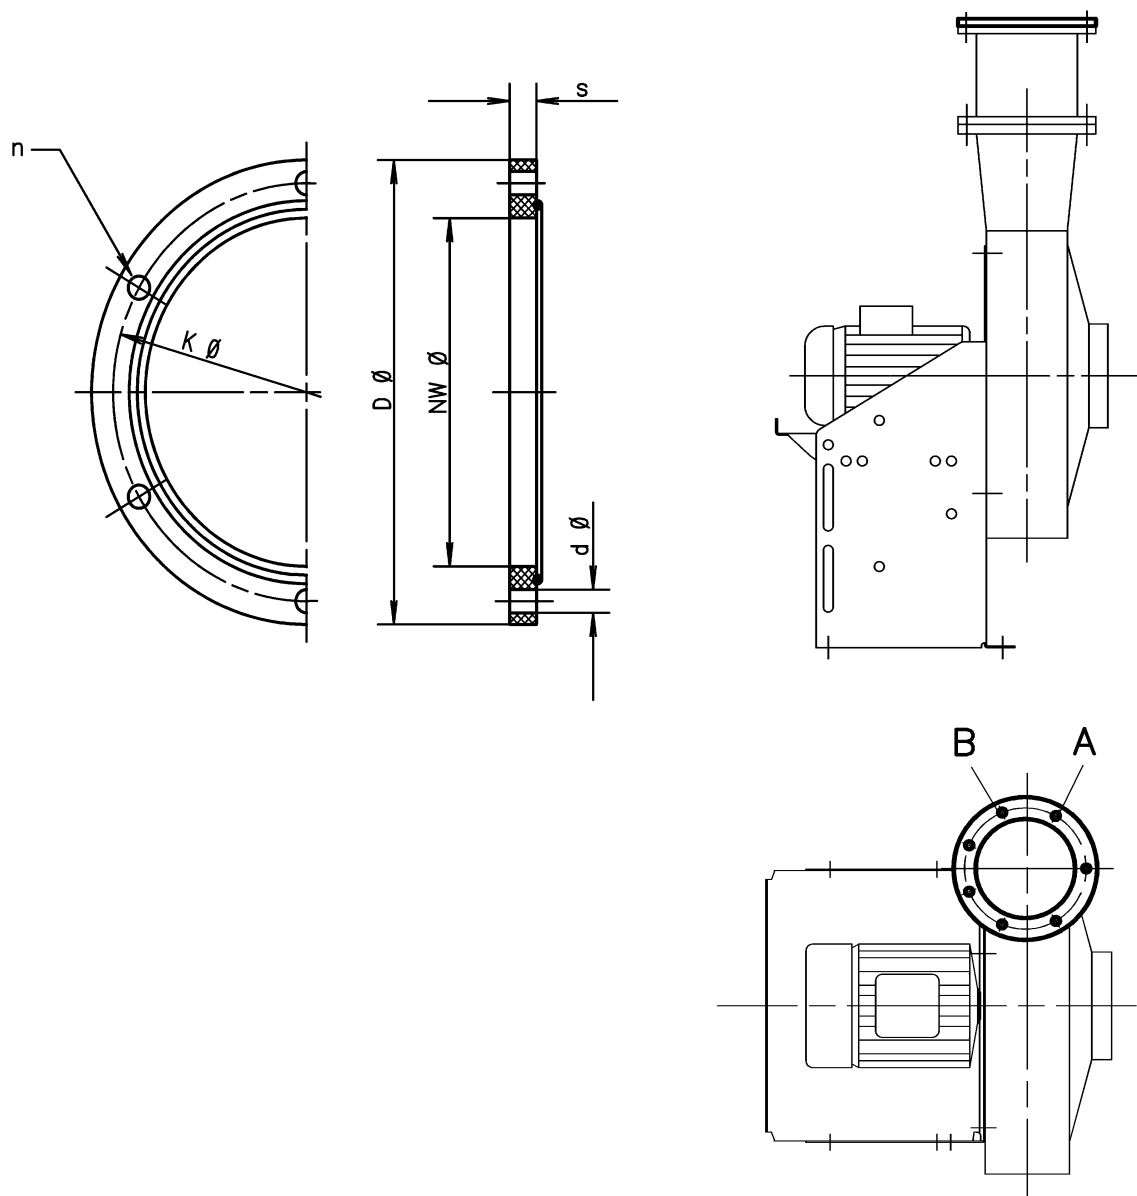

Typ ventilátoru NW Ø	Rozměry					
	D	s	K	d	n	Poz.
63	120	12	95	9	6 x 60°	A
90	150	12	125	9	6 x 60°	A
125	185	12	160	9	6 x 60°	A
160	220	12	195	9	8 x 45°	B
200	260	12	235	9	10 x 36°	A
250	310	12	285	9	10 x 36°	A

Tlumiče vibrací pro montáž na zem nebo zavěšení ke stropu

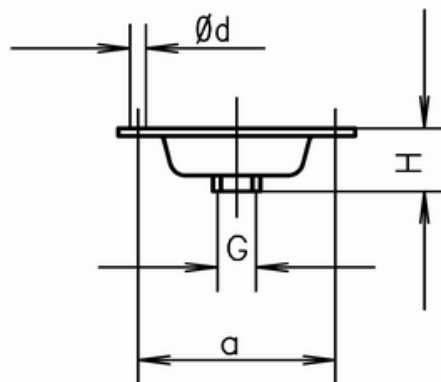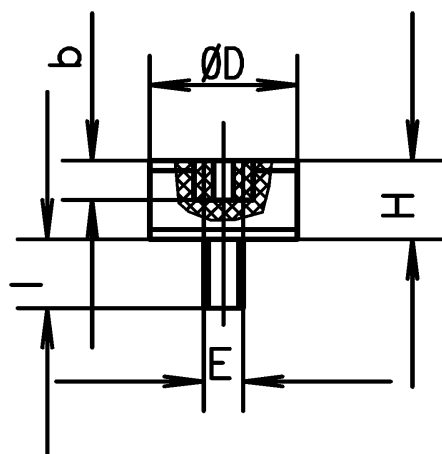
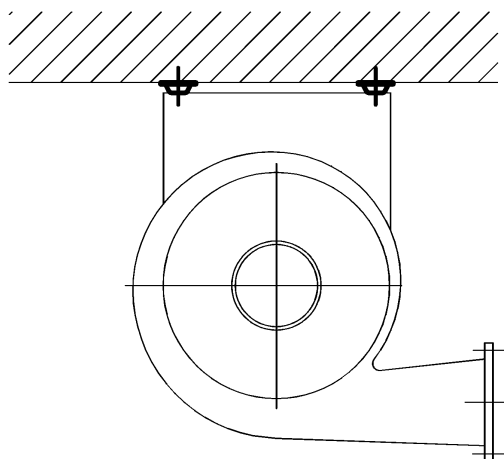
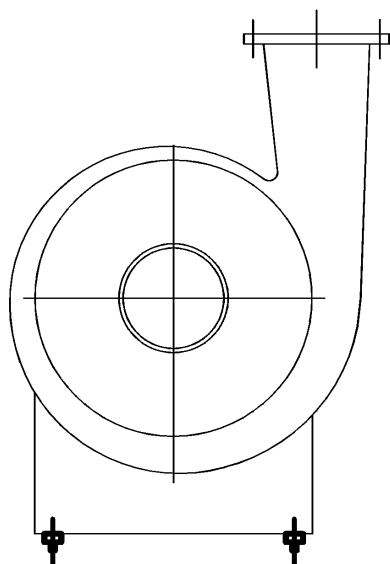


Vlnovec Typ	Rozměry				
	D	H	E	I	b
V 8/40	40	40	M8	23	7

Vlnovec Typ	Rozměry			
	H	G	a	d
G-E 10	30	M10	85	10,5

Typ ventilátoru	Pro montáž na zem	Pro zavěšení ke stropu	Počet prvků
CHVS 63-250	V 8/40	G-E 10	4

Odvodnění

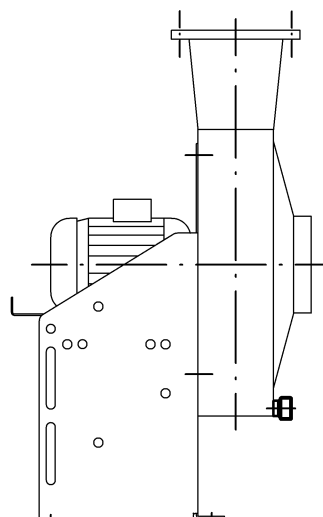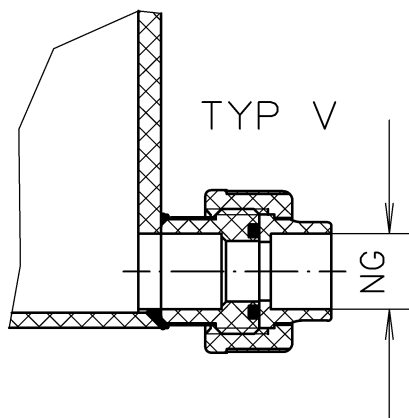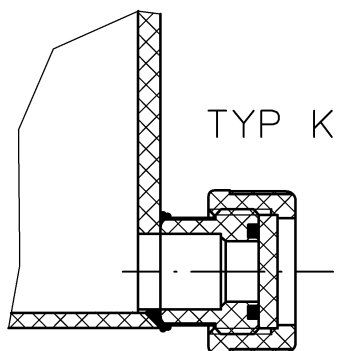

Typ ventilátoru	s víčkem	s armaturou	NG
CHVS 63-250	Typ K	Typ V	20

Ochrana proti úlomkům

