



PP-H Zpětná klapka, DIN* mezipřírubový typ

Popis


* DIN = EN1092-1 PN10 ANSI = ASME B16.5 třída 150
Titanový čep klapky pro všechny DN. PVDF kolík na vyžádání.
EPDM těsnění k dispozici na vyžádání.

EPDM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	B (mm)	PN
1	63	50	2"	23	109	28	16
2	75	65	2"1/2	23	130	32	16
3	90	80	3"	23	144	40	16
4	110	100	4"	23	164	63	16
5	140	125	5"	25	194	77	16
6	160	150	6"	25	220	90	10
7	225	200	8"	35	275	126	10
8	280	250	10"	35	330	140	5
9	315	300	12"	40	380	176	4
10	355	350	14"	50	422	250	3
11	400	400	16"	50	470	287	3
12	450	450	18"	60	538	339	2

FPM

#	d (mm)	DN (mm)	DN (inch)	L (mm)	H (mm)	B (mm)	PN
1	63	50	2"	23	109	28	16
2	75	65	2"1/2	23	130	32	16
3	90	80	3"	23	144	40	16
4	110	100	4"	23	164	63	16
5	140	125	5"	25	194	77	16
6	160	150	6"	25	220	90	10
7	225	200	8"	35	275	126	10
8	280	250	10"	35	330	140	5
9	315	300	12"	40	380	176	4
10	355	350	14"	50	422	250	3
11	400	400	16"	50	470	287	3
12	450	450	18"	60	538	339	2

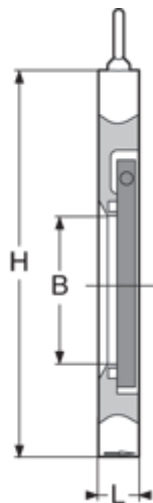

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.
Přeloženo z originálu výrobce.

Farprosys, s.r.o.
email: info@farprosys.com
tel. +420 728 757 770
www.atexventilatory.cz